



MODLINK MSDD FRONT PANEL INTERFACES


- PLC Service Port
- IP65 Protection
- Modular Inserts

DESIGN YOUR OWN PART – WITH OUR ARTICLE NUMBERS

The article numbers help you figure out whether you are ordering outlets, data connector inserts, individual frames or sets. The article numbers of the individual components can be found on the following pages. Both modules and sets can be ordered in quantities of 1 or more.

THE SET


The set article number is made up of A, B, C and D.

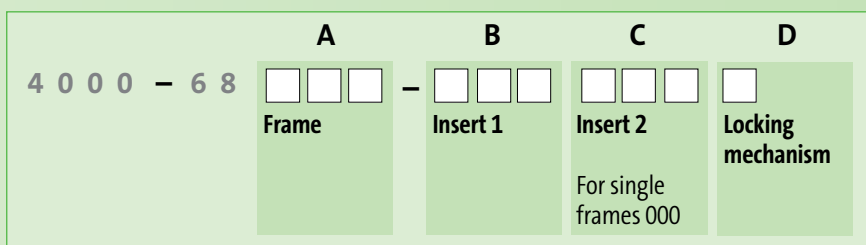


First select your components:

- Block A:** Frame (for example 4000-68**522**-000 0001 for transparent double frame)
- Block B:** Insert 1 (for example 4000-68000-**001** 0000 for Germany (VDE) gray)
- Block C:** Insert 2 (for example 4000-68000-**091** 0000 for 2x RJ45 + 2x USB)
- Block D:** Locking mechan. (for example 4000-68522-000 000**1** for 3 mm double-bit key)

The article number for this example set will be:




Modlink MSDD Front Panel Interfaces



Frames

- Single and double frames


Page 2.1.1



Inserts

- Power outlets
- Data connection inserts


Page 2.1.2



Built-in Sockets

- USB
- RJ45

Page 2.1.19










Accessories

Page 2.1.20







FRONT PANEL INTERFACES

Frames (plastic)			Art-No.
	1-way transparent Mounting frame plastic PBT black Lid plastic PC transparent	cURus Closure: 3 mm double bit with pluggable rotation knob	4000-68512-0000001
	Mounting frame plastic PBT black Lid plastic PC transparent	Closure: Daimler	4000-68512-0000003
	1-way metallic Mounting frame plastic PBT black Lid plastic PBT gray	cURus Closure: 3 mm double bit with pluggable rotation knob	4000-68513-0000001
	Mounting frame plastic PBT black Lid plastic PBT gray	Closure: Daimler	4000-68513-0000003
	1-way gray Mounting frame plastic PBT black Lid plastic PBT gray	cURus Closure: 3 mm double bit with pluggable rotation knob	4000-68514-0000001
	Mounting frame plastic PBT black Lid plastic PBT gray	Closure: Daimler	4000-68514-0000003
	2-way transparent Mounting frame plastic PBT black Lid plastic PC transparent	cURus Closure: 3 mm double bit with pluggable rotation knob	4000-68522-0000001
	Mounting frame plastic PBT black Lid plastic PC transparent	Closure: Daimler	4000-68522-0000003
	2-way metallic Mounting frame plastic PBT black Lid plastic PBT gray	cURus Closure: 3 mm double bit with pluggable rotation knob	4000-68523-0000001
	Mounting frame plastic PBT black Lid plastic PBT gray	Closure: Daimler	4000-68523-0000003
	2-way gray Mounting frame plastic PBT black Lid plastic PBT gray	cURus Closure: 3 mm double bit with pluggable rotation knob	4000-68524-0000001
	Mounting frame plastic PBT black Lid plastic PBT gray	Closure: Daimler	4000-68524-0000003








FRONT PANEL INTERFACES

Power outlets			Art-No.
	<p>Germany (VDE) white Screw terminals: max. 6 mm² Operating voltage: max. 250 V AC Operating current: max. 16 A</p>	LED (yellow)	4000-68000-0010000
	<p>Germany (VDE) white Spring clamp terminals: max. 2.5 mm² (AWG 14) Operating voltage: max. 250 V AC Operating current: max. 16 A</p>		4000-68000-0160000
	<p>Germany (VDE) yellow Screw terminals: max. 6 mm² Operating voltage: max. 250 V AC Operating current: max. 16 A</p>		4000-68000-0020000
	<p>Germany (VDE) orange Spring clamp terminals: max. 2.5 mm² (AWG 14) Operating voltage: max. 250 V AC Operating current: max. 16 A</p>		4000-68000-0140000
	<p>France (UTE-NF) gray Screw terminals: max. 6 mm² Operating voltage: max. 250 V AC Operating current: max. 16 A</p>	LED (yellow)	4000-68000-0050000
	<p>France (UTE-NF) gray Screw terminals: max. 4 mm² Operating voltage: max. 250 V AC Operating current: max. 16 A</p>		4000-68000-3010000
	<p>France (UTE-NF) red Spring clamp terminals: max. 2.5 mm² (AWG 14) Operating voltage: max. 250 V AC Operating current: max. 16 A</p>	with touch protection	4000-68000-0130000

FRONT PANEL INTERFACES

Power outlets			Art-No.
	<p>France (UTE-NF) orange Spring clamp terminals: max. 2.5 mm² (AWG 14) Operating voltage: max. 250 V AC Operating current: max. 16 A</p>		4000-68000-0150000
	<p>USA (NEMA 5-15) Plug-solder connection: 4.8 × 0.8 mm Operating voltage: max. 125 V AC Operating current: max. 15 A</p>	cURus	4000-68000-0030000
	<p>USA (NEMA 5-15) Plug-solder connection: L 6.3 × 0.8 mm/N (PE) 4.8 × 0.8 mm Operating voltage: max. 125 V AC Operating current: max. 3 A</p>	cURus Fuse 3 A	4000-68000-0110000
	<p>USA (NEMA 5-15) Screw terminals: max. 2.5 mm² (AWG 14) Operating voltage: max. 125 V AC Operating current: max. 15 A</p>	cURus without touch protection	4000-68000-3240000
	<p>USA (NEMA 5-15) Screw terminals: max. 2.5 mm² (AWG 14) Operating voltage: max. 125 V AC Operating current: max. 15 A</p>		4000-68000-0040000
	<p>USA (2 × NEMA-GFCI 5-15) Screw terminals: max. 2.5 mm² (AWG 14) Operating voltage: max. 125 V AC Operating current: max. 15 A</p>	cURus without touch protection	4000-68000-3220000
	<p>USA (2 × NEMA-GFCI 5-20) Screw terminals: max. 6 mm² Operating voltage: max. 125 V AC Operating current: max. 20 A per socket</p>	cURus without touch protection	4000-68000-3280000








FRONT PANEL INTERFACES

Power outlets			Art-No.
	<p>England (BS) Screw terminals: max. 4 mm² Operating voltage: max. 250 V AC Operating current: max. 13 A</p>		4000-68000-0060000
	<p>England (BS) orange Screw terminals: max. 4 mm² Operating voltage: max. 250 V AC Operating current: max. 13 A</p>		4000-68000-0190000
	<p>Italy (CEI 23-16) Screw terminals: max. 2.5 mm² (AWG 14) Operating voltage: max. 250 V AC Operating current: max. 16 A</p>	Double	4000-68000-0070000
	<p>Italy (CEI 23-16) Screw terminals: max. 2.5 mm² (AWG 14) Operating voltage: max. 250 V AC Operating current: max. 16 A</p>		4000-68000-0180000
	<p>EURO/USA Screw terminals: max. 2.5 mm² (AWG 14) Operating voltage: max. 250 V AC (EU); max. 125 V AC (USA) Operating current: max. 16 A (EU); max. 15 A (USA)</p>		4000-68000-0100000
	<p>Denmark Spring clamp terminals: max. 2.5 mm² (AWG 14) Operating voltage: max. 250 V AC Operating current: max. 10 A</p>		4000-68000-0170000
	<p>Swiss Spring clamp terminals: max. 1.5 mm² (AWG 16) Operating voltage: max. 250 V AC Operating current: max. 10 A</p>		4000-68000-0120000

FRONT PANEL INTERFACES

Power outlets			Art-No.
	<p>Australia Screw terminals: max. 2.5 mm² (AWG 14) Operating voltage: max. 250 V AC Operating current: max. 10 A</p>		4000-68000-0090000
	<p>India (IS 1293) Screw terminals: max. 4 mm² Operating voltage: max. 240 V AC Operating current: max. 6 A</p>		4000-68000-3210000
	<p>China (CCC) Screw terminals: max. 4 mm² Operating voltage: max. 250 V AC Operating current: max. 10 A</p>		4000-68000-3250000
	<p>Brazil Screw terminals: max. 2.5 mm² (AWG 14) Operating voltage: max. 250 V AC Operating current: max. 10 A</p>	Double	4000-68000-3290000
	<p>Brazil Screw terminals: max. 2.5 mm² (AWG 14) Operating voltage: max. 250 V AC Operating current: max. 10 A</p>	Single	4000-68000-3310000

FRONT PANEL INTERFACES








Communication inserts			Art-No.
	SUB-D9; SUB-D9 2 × SUB-D9 (female/male)	cURus	4000-68000-020000
	SUB-D9; SUB-D9 2 × SUB-D9 (solder connection/female)	cURus	4000-68000-0210000
	SUB-D9; SUB-D9 1 × SUB-D9 (solder connection/male) 1 × SUB-D9 (solder connection/female)	cURus	4000-68000-0220000
	SUB-D9 1 × SUB-D9 (solder connection/male) 1 × SUB-D9 (blind plug)	cURus	4000-68000-0230000
	SUB-D9; SUB-D15 1 × SUB-D9 (male/female) 1 × SUB-D15 (male/female)	cURus	4000-68000-0300000
	SUB-D9; SUB-D15 1 × SUB-D9 (solder connection/male) 1 × SUB-D15 (solder connection/male)	cURus	4000-68000-0310000
	SUB-D9; SUB-D15 1 × SUB-D9 (female/female) 1 × SUB-D15 (male/male)	cURus	4000-68000-0320000

Communication inserts			Art-No.
	<p>SUB-D9; SUB-D25 1 × SUB-D9 (male/female) 1 × SUB-D25 (male/female)</p>	cURus	4000-68000-040000
	<p>SUB-D9; SUB-D25 1 × SUB-D9 (solder connection/male) 1 × SUB-D25 (solder connection/male)</p>	cURus	4000-68000-0410000
	<p>SUB-D9; SUB-D25 1 × SUB-D9 (solder connection/female) 1 × SUB-D25 (solder connection/male)</p>	cURus	4000-68000-0420000
	<p>SUB-D9; SUB-D25 1 × SUB-D9 (female/female) 1 × SUB-D25 (male/female)</p>		4000-68000-0430000
	<p>SUB-D15; SUB-D15 2 × SUB-D15 (female/male)</p>	cURus	4000-68000-0500000
	<p>SUB-D15; SUB-D15 2 × SUB-D15 (solder connection/female)</p>	cURus	4000-68000-0510000
	<p>SUB-D15 1 × SUB-D15 (solder connection/male) 1 × SUB-D9 (blind plug)</p>	cURus	4000-68000-0530000








FRONT PANEL INTERFACES

Communication inserts			Art-No.
	SUB-D15; SUB-D25 1 × SUB-D15 (male/female) 1 × SUB-D25 (male/female)	cURus	4000-68000-0600000
	SUB-D15; SUB-D25 1 × SUB-D15 (solder connection/male) 1 × SUB-D25 (solder connection/male)	cURus	4000-68000-0610000
	SUB-D25; SUB-D25 2 × SUB-D25 (female/male)	cURus	4000-68000-0700000
	SUB-D25; SUB-D25 2 × SUB-D25 (solder connection/female)	cURus	4000-68000-0710000
	SUB-D25 1 × SUB-D25 (solder connection/male) 1 × SUB-D9 (blind plug)	cURus	4000-68000-0730000
	SUB-D25 1 × SUB-D25 (male/female) 1 × SUB-D9 (blind plug)	cURus	4000-68000-0740000
	PS2; PS2; SUB-D15 HD 2 × PS2 (6-pole solder connection) 1 × SUB-D15 HD (male/female) VGA		4000-68000-0800000








FRONT PANEL INTERFACES

Communication inserts			Art-No.
	<p>PS2; SUB-D15 HD 1 × PS2 (6-pole solder connection) 1 × SUB-D15 HD (solder connection/male) VGA</p>		4000-68000-0810000
	<p>SUB-D15 HD; RJ45; USB; USB (form A) 1 × SUB-D15 HD (male/female) VGA 1 × RJ45, 8-pole metal, CAT5e (female/female) 2 × USB (female/female) form A</p>	cURus shielded	4000-68000-1040000
	<p>RJ45; RJ45; USB (form A) 2 × RJ45, 8-pole metal, CAT5e (female/female) 1 × USB (female/female) form A</p>	cURus shielded	4000-68000-0940000
	<p>RJ45; USB (form A); DVI 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × USB (female/female) form A 1 × DVI (male/male)</p>		4000-68000-0820000
	<p>RJ45; RJ45; USB; USB (form A) 2 × RJ45, 8-pole metal, CAT5e (female/female) 2 × USB (female/female/0.7 m cable) form A</p>	shielded	4000-68000-0990000
	<p>RJ45; RJ12; USB; USB (form A) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × RJ12, 6-pole plastic 2 × USB (female/female) form A</p>	cURus shielded	4000-68000-0910000
	<p>RJ45; USB; USB (form A) 1 × RJ45, 8-pole metal, CAT5e (female/female) 2 × USB (female/female) form A</p>	shielded	4000-68000-0960000








FRONT PANEL INTERFACES

Communication inserts			Art-No.
	RJ45; RJ45; USB; USB (form A) 2 × RJ45, 8-pole metal, CAT5e (female/female) 2 × USB (female/female) form A	shielded	4000-68000-0970000
	RJ45; RJ12; SUB-D25 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × RJ12, 6-pole plastic 1 × SUB-D25 (male/female)	cURus	4000-68000-1100000
	RJ45; SUB-D9; SUB-D9 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × SUB-D9 (female/female) 1 × SUB-D9 (female/female)	cURus	4000-68000-1110000
	RJ45; RJ12; SUB-D9 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × RJ12, 6-pole plastic 1 × SUB-D9 (female/female)	cURus shielded	4000-68000-1120000
	RJ45; USB; GC/GC 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × USB (female/female) form A 1 × GC (female/female) 1 × GC (male/male)	shielded	4000-68000-1140000
	RJ12; RJ12; SUB-D9 2 × RJ12, 6-pole plastic 1 × SUB-D9 (female/female)	shielded	4000-68000-1090000
	RJ45; SUB-D9; SUB-D9 1 × RJ45, 8-pole metal, CAT5e (female/female) 2 × SUB-D9 (female/female)	shielded	4000-68000-1160000








FRONT PANEL INTERFACES

Communication inserts			Art-No.
	<p>RJ45; USB (form A); SUB-D9; SUB-D9 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × USB (female/female) form A 2 × SUB-D9 (female/female)</p>	shielded	4000-68000-1180000
	<p>RJ45; USB (form A); SUB-D9; SUB-D9 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × USB (female/female) form A 1 × SUB-D9 (female/female) 1 × SUB-D9 (female/female)</p>	shielded	4000-68000-1190000
	<p>RJ45; RJ45 2 × RJ45, 8-pole metal, CAT5e (female/female)</p>	cURus shielded	4000-68000-1200000
	<p>RJ45 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × SUB-D9 (blind plug)</p>	cURus	4000-68000-1210000
	<p>RJ45; RJ45; RJ45; RJ45 4 × RJ45, 8-pole metal, CAT5e (female/female)</p>	shielded	4000-68000-1220000
	<p>USB (form A); RJ45 1 × USB (female/female) form A 1 × RJ45, 8-pole metal, CAT5e (female/female)</p>	cURus shielded	4000-68000-1310000
	<p>RJ45; SUB-D9 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × SUB-D9 (female/female)</p>	cURus shielded	4000-68000-1410000

FRONT PANEL INTERFACES

Communication inserts			Art-No.
	SUB-D9; RJ45; USB (form A) 1 × SUB-D9 (female/female) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × USB (male/male/0.7 m cable) form A	shielded	4000-68000-1420000
	RJ45; USB (form A); SUB-D9 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × USB (female/female) form A 1 × SUB-D9 (male/female)	cURus shielded	4000-68000-1430000
	RJ45; USB (form A); SUB-D9 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × USB (female/female) form A 1 × SUB-D9 (female/female)	cURus shielded	4000-68000-1440000
	RJ45; USB (form A); SUB-D9 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × USB (female/female) form A 1 × SUB-D9 (solder connection/male)	shielded	4000-68000-1460000
	RJ45; RJ45; SUB-D25 2 × RJ45, 8-pole metal, CAT5e (female/female) 1 × SUB-D25 (male/female)	cURus shielded	4000-68000-1600000
	SUB-D25; RJ45; USB (pre-cut) 1 × SUB-D25 (male/female) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × USB (pre-cut)	shielded	4000-68000-1610000
	RJ45; RJ45; SUB-D9 2 × RJ45, 8-pole metal, CAT5e (female/female) 1 × SUB-D9 (male/female)	shielded	4000-68000-1620000

FRONT PANEL INTERFACES

Communication inserts			Art-No.
	<p>RJ45; SUB-D9; SUB-D25 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × SUB-D9 (male/female) 1 × SUB-D25 (male/female)</p>	cURus	4000-68000-1700000
	<p>BNC; RJ45; SUB-D9 1 × BNC (male/male) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × SUB-D9 (male/female)</p>	shielded	4000-68000-1800000
	<p>BNC; RJ45; SUB-D9 1 × BNC (male/male) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × SUB-D9 (female/female)</p>		4000-68000-1810000
	<p>RJ45; USB; USB (form A) 1 × RJ45, 8-pole metal, CAT5e (female/female) 2 × USB (female/female/0.7 m cable) form A</p>	shielded	4000-68000-0980000
	<p>USB (form A); SUB-D25 1 × USB (male/male/0.7 m cable) form A 1 × SUB-D25 (male/female)</p>	shielded	4000-68000-1000000
	<p>USB (form A); SUB-D25; RJ45 1 × USB (female/female) form A 1 × SUB-D25 (male/female) 1 × RJ45, 8-pole metal, CAT5e (female/female)</p>	cURus shielded	4000-68000-1450000
	<p>USB (form A); RJ45 1 × USB (male/male/0.7 m cable) form A 1 × RJ45, 8-pole metal, CAT5e (female/female)</p>	shielded	4000-68000-1300000








FRONT PANEL INTERFACES

Communication inserts			Art-No.
	USB (form A); SUB-D9; RJ45 1 × USB (male/male/0.7 m cable) form A 1 × SUB-D9 (male/female) 1 × RJ45, 8-pole metal, CAT5e (female/female)	shielded	4000-68000-1400000
	USB; USB (form A) 2 × USB (female/female/0.7 m cable) form A	shielded	4000-68000-0900000
	USB (form A to A) 1 × USB (female/female) form A	cURus shielded	4000-68000-0920000
	USB (form A); USB (form A) 2 × USB (female/female) form A	cURus shielded	4000-68000-0930000
	USB; USB; USB; USB (form A) 4 × USB (female/female) form A		4000-68000-0950000
	USB (form A); SUB-D25 1 × USB (female/female) form A 1 × SUB-D25 (male/female)	cURus shielded	4000-68000-1010000
	USB (form A); SUB-D9 1 × USB (female/female) form A 1 × SUB-D9 (solder connection/male)		4000-68000-1020000

FRONT PANEL INTERFACES

Communication inserts			Art-No.
	<p>USB (form A); SUB-D25; RJ45 1 × USB (female/female) form A 1 × SUB-D25 (male/solder connection) 1 × RJ45, 8-pole metal, CAT5e (female/female)</p>	shielded	4000-68000-1470000
	<p>USB (form A); SUB-D9; RJ12 1 × USB (female/female) form A 1 × SUB-D9 (female/female) 1 × RJ12, 6-pole plastic</p>	shielded	4000-68000-1480000
	<p>RJ45; USB (form A); SUB-D9; SUB-D9 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × USB (female/female) form A 1 × SUB-D9 (male/female) 1 × SUB-D9 (male/female)</p>		4000-68000-1240000
	<p>RJ45; USB; USB (form A); SUB-D9 (pre-cut) 1 × RJ45, 8-pole metal, CAT5e (female/female) 2 × USB (female/female) form A 1 × blind plug for SUB-D9</p>		4000-68000-1250000
	<p>RJ45; RJ12; USB; USB (form A); SUB-D9 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × RJ12, 6-pole plastic 1 × USB (female/female) form A 1 × SUB-D9 (female/female)</p>		4000-68000-1270000
	<p>USB (form A); DVI 2 × USB (female/female) form A 1 × DVI (male/male)</p>		4000-68000-1280000
	<p>SUB-D9 (female) 1 × blind plug for SUB-D9 1 × SUB-D9 (female) PROFIBUS</p>		4000-68000-2000000








FRONT PANEL INTERFACES

Combinations			Art-No.
	<p>USA (NEMA 5-15); SUB-D25; RJ45</p> <p>1 × NEMA 5-15 (plug-solder connection) 1 × SUB-D25 (male/female) 1 × RJ45, 8-pole metal, CAT5e (female/female)</p>	cURus	4000-68000-400000
	<p>USA (NEMA 5-15); RJ45; SUB-D9</p> <p>1 × NEMA 5-15 (plug-solder connection) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × SUB-D9 (female/female)</p>	cURus	4000-68000-4010000
	<p>USA (NEMA 5-15); RJ45; SUB-D9</p> <p>1 × NEMA 5-15 (plug-solder connection) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × SUB-D9 (male/female)</p>	cURus	4000-68000-4020000
	<p>USA (NEMA 5-15); RJ45; USB (form A)</p> <p>1 × NEMA 5-15 (plug-solder connection) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × USB (female/female) form A</p>	cURus	4000-68000-4030000
	<p>USA (NEMA 5-15); RJ45</p> <p>1 × NEMA 5-15 (plug-solder connection) 1 × RJ45, 8-pole metal, CAT5e (female/female)</p>	cURus	4000-68000-4040000
	<p>USA (NEMA 5-15); RJ45; RJ12</p> <p>1 × NEMA 5-15 (plug-solder connection) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × RJ12, 6-pole plastic</p>		4000-68000-4050000
	<p>USA (NEMA 5-15); RJ45; RJ45</p> <p>1 × NEMA 5-15 (plug-solder connection) 2 × RJ45, 8-pole metal, CAT5e (female/female)</p>		4000-68000-4060000









FRONT PANEL INTERFACES

Combinations			Art-No.
	USA (NEMA 5-15); RJ45; USB (form A); Fuse 1 × NEMA 5-15 (screw terminals) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × USB (female/female) form A 1 × fuse (3 A)	cURus with touch protection	4000-68000-4200000
	USA (NEMA 5-15); RJ45; USB (form A); Fuse 1 × NEMA 5-15 (screw terminals) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × fuse (3 A)	cURus with touch protection	4000-68000-4210000
	USA (NEMA 5-15); RJ45; RJ45; Fuse 1 × NEMA 5-15 (screw terminals) 2 × RJ45, 8-pole metal, CAT5e (female/female) 1 × fuse (3 A)	cURus with touch protection	4000-68000-4220000
	USA (NEMA 5-15); RJ45; SUB-D9 HD; fuse 1 × NEMA 5-15 (screw terminals) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × SUB-D9 (male/female) 1 × fuse (3 A)	cURus with touch protection	4000-68000-4230000
	USA (NEMA 5-15); Fuse 1 × NEMA 5-15 (screw terminals) 1 × fuse (3 A)	cURus with touch protection	4000-68000-4240000
	USA (2 × NEMA-GFCI 5-15); RJ45; USB (form A); fuse 2 × NEMA-GFCI 5-15 (screw terminals) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × USB (female/female) form A 1 × fuse (3 A)	cURus with touch protection	4000-68000-4100000
	USA (2 × NEMA-GFCI 5-15); RJ45; fuse 2 × NEMA-GFCI 5-15 (screw terminals) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × fuse (3 A)	cURus with touch protection	4000-68000-4110000
	USA (2 × NEMA-GFCI 5-15); RJ45; RJ45; fuse 2 × NEMA-GFCI 5-15 (screw terminals) 2 × RJ45, 8-pole metal, CAT5e (female/female) 1 × fuse (3 A)	cURus with touch protection	4000-68000-4120000



FRONT PANEL INTERFACES

Combinations			Art-No.
	USA (2 × NEMA-GFCI 5-15); RJ45; SUB-D9; fuse 2 × NEMA-GFCI 5-15 (screw terminals) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × SUB-D9 (male/female) 1 × fuse (3 A)	cURus with touch protection	4000-68000-4130000
	USA (2 × NEMA-GFCI 5-15); fuse 2 × NEMA-GFCI 5-15 (screw terminals) 1 × fuse (3 A)	cURus with touch protection	4000-68000-4140000
	Germany (VDE); FI cut-out 1 × VDE 1 × FI-cut-out		4000-68000-4300000
	Germany (VDE); RJ45; FI-cut-out 1 × VDE 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × FI-cut-out		4000-68000-4300001
	Germany (VDE) yellow; FI cut-out 1 × VDE yellow 1 × FI-cut-out		4000-68000-4390000
	Germany (VDE) yellow; RJ45; FI-cut-out 1 × VDE yellow 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × FI-cut-out		4000-68000-4390001
	Australia; FI cut-out 1 × Australia 1 × FI-cut-out		4000-68000-4360000
	Australia; RJ45; FI-cut-out) 1 × Australia 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × FI-cut-out		4000-68000-4360001

FRONT PANEL INTERFACES

Combinations			Art-No.
	Swiss; FI cut-out 1 × Swiss 1 × FI-cut-out		4000-68000-4340000
	Swiss; RJ45; FI cut-out 1 × Swiss 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × FI-cut-out		4000-68000-4340001
	Italy (CEI 23-16); FI cut-out 1 × Italy (CEI 23-16) 1 × FI-cut-out		4000-68000-4330000
	Italy (CEI 23-16); RJ45; FI-cut-out 1 × Italy (CEI 23-16) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × FI-cut-out		4000-68000-4330001
	Great Britain (BS); FI cut-out 1 × Great Britain (BS) 1 × FI-cut-out		4000-68000-4320000
	Great Britain (BS); RJ45; FI-cut-out 1 × Great Britain (BS) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × FI-cut-out		4000-68000-4320001
	France (UTE-NF); FI cut-out France (UTE-NF) 1 × FI-cut-out		4000-68000-4310000
	France (UTE-NF); RJ45; FI-cut-out 1 × France (UTE-NF) 1 × RJ45, 8-pole metal, CAT5e (female/female) 1 × FI-cut-out		4000-68000-4310001

FRONT PANEL INTERFACES

Pass-through			Art-No.
	Pass-through 1 × RJ45, 8-pole metal, CAT5e (female/female)	cULus	4000-73000-0010000
	Pass-through 1 × USB 3.0 (female/male) form A, 0.6 m cable 1 × USB 3.0 (female/male) form A, 1.0 m cable 1 × USB 3.0 (female/male) form A, 1.5 m cable 1 × USB 3.0 (female/male) form A, 2.0 m cable	cULus cULus cULus cULus	4000-73000-0150000 4000-73000-0160000 4000-73000-0170000 4000-73000-0180000

FRONT PANEL INTERFACES

Connection accessories			Art-No.
	Gender Changer RJ45 (female /female)	cURus	4000-68000-9040010
	Gender Changer RJ12; (female/female)		4000-68000-9040011
	Gender Changer USB (form A to A)		4000-68000-9040020
	USB (form A to B)		4000-68000-9040025
	Gender Changer SUB-D9 (female/female)	cURus	4000-68000-9040030
	SUB-D9 (female/male)	cURus	4000-68000-9040031
	Gender Changer SUB-D9 (male/male)	cURus	4000-68000-9040032
	Gender Changer SUB-D15 (female/male)	cURus	4000-68000-9040040
	SUB-D15 (female/female)	cURus	4000-68000-9040041
	Gender Changer SUB-D15 (male/male)	cURus	4000-68000-9040042
	Gender Changer SUB-D15 HD (female/male) VGA	cURus	4000-68000-9040045
	Gender Changer SUB-D25 (female/female)	cURus	4000-68000-9040050
	SUB-D25 (female/male)	cURus	4000-68000-9040051

FRONT PANEL INTERFACES

Connection accessories			Art-No.
	Gender Changer PS2 (female/female) 6-pole		4000-68000-9040060
	Mini DIN; (female/female) 8-pole		4000-68000-9040065
	Gender Changer BNC		4000-68000-9040070
	Gender Changer DVI; (female/female)		4000-68000-9040080
	Cable SUB-D9 (male/male); 2 m	shielded	4000-68000-9030010
	SUB-D9 (male/male); 5 m	shielded	4000-68000-9030011
	SUB-D9 (female/male); 2 m	shielded	4000-68000-9030020
	SUB-D9 (female/male); 5 m	shielded	4000-68000-9030021
	Cable SUB-D25 (female/male); 1.8 m	shielded	4000-68000-9030040
	SUB-D25 (female/male); 5 m	shielded	4000-68000-9030041
	Cable USB (form A to A); 2 m (male/male)	shielded	4000-68000-9030050
	USB (form A to A); 5 m (male/male)	shielded	4000-68000-9030051
	USB (form A to A); 2 m (male/male) PUR	shielded	4000-68000-9030052
	USB (form A to A); 5 m (male/male) PUR	shielded	4000-68000-9030053
	USB (form A to B); 2 m	shielded	4000-68000-9030054
	USB (form A to B); 5 m	shielded	4000-68000-9030055
	Cable RJ45 (8/8-pole) metal, CAT6; 2 m	shielded	4000-68000-9030060
	RJ45 (8/8-pole) metal, CAT6; 5 m	shielded	4000-68000-9030061
	RJ45 (8/8-pole) metal, CAT6; 10 m	shielded	4000-68000-9030062

FRONT PANEL INTERFACES

Mounting accessories			Art-No.
	<p>Ground strap 6 mm² 100 mm for screw (M4) 200 mm for screw (M4) 300 mm for screw (M4)</p>		<p>4000-71001-0610004 4000-71001-0620004 4000-71001-0630004</p>
	<p>Blind plate (flat) Self-installation available space: 45 × 75 mm</p>	cURus	4000-68000-8900000
	<p>Blind plate (depth) Self-installation available space: 34 × 58 mm Cavity: 13 mm deep</p>	cURus	4000-68000-8910000
	<p>Blind plates (pre-cut) 1 × USB, 1 × RJ45, 1 × SUB-D9</p>	cURus shielded	4000-68000-8500000
	<p>Blind plates (pre-cut) 1 × USB, 1 × RJ45, 1 × SUB-D25</p>	cURus shielded	4000-68000-8510000
	<p>Housing (1-way) with 4 blind plugs (M16 × 1.5) H × W × D: 180×94×81 mm</p>		4000-68000-9060010
	<p>Housing (2-way) with 6 blind plugs (M16 × 1.5) H × W × D: 182×180×90 mm</p>		4000-68000-9060020

FRONT PANEL INTERFACES

Mounting accessories			Art-No.
	Touch protection box for double frame 124×124×67 mm	cURus	4000-68000-9140000
	Metal Flange Plate for single frame 178×182×22 mm	cURus	4000-68000-9150000
	Metal Flange Plate for double frame 178×182×22 mm	cURus	4000-68000-9160000
	Cable compression gland M16	Cable diameter (4...8 mm)	4000-68000-9060030
	Protection cap SUB-D9 (female)	cURus	4000-68000-9100000
	SUB-D9 (male)	cURus	4000-68000-9130000
	SUB-D15 (female)	cURus	4000-68000-9110000
	SUB-D25 (female)	cURus	4000-68000-9120000
	Label plate Frame: 20 pcs.	cURus	4000-68000-9000000