


H05 V-K PVC-Single Cores, fine wire stranded

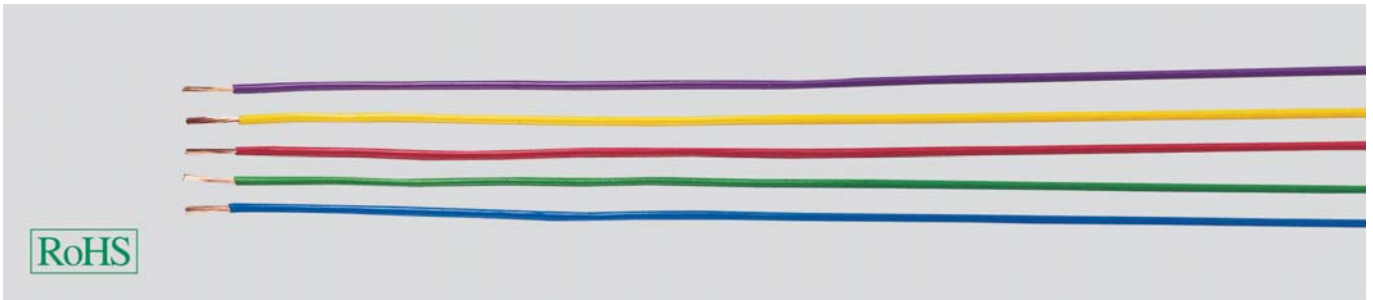

기술사양

- DIN VDE 0281-3 규격의 PVC 단선
H05 V-K/H05 V-U : DIN VDE 0281 part 3, HD 21,3 S3, IEC 60227-3 규격
- 온도범위
이송시 -5°C ~ +70°C
고정 설치시 -30°C ~ +80°C
- 정격전압 U₀/U 300/500V
- 시험전압
H05 V-K 2000V
- 절연저항
최소 10M Ohm/km
- 최소 곡률 반경
12.5 x cable ø
- 내 방사선 성능
up to 80x10⁸ cJ/Kg (up to 80Mrad)

케이블 구조

- 나동연선 DIN VDE 0295 cl.5, BS 6360 cl.5, HD 383 및 IEC 60228 cl.5 규격
- PVC 코아 절연체, 구성
Tf (DIN VDE 0281 part 3, HD 21,3 S3 and IEC 60227-3)
- 코아 색상분류 표시 DIN VDE 0293
- 가능한 색 : 흑색, 백색, 청색, 회색, 갈색, 적색, 적황색, 청록색, 자색, 분홍색
녹색과 황색 : 안전 규칙에 적합할 경우에만 사용. 녹색은 발광 장식 회로 표시. 위 색들의 두색 조합 가능.

특징

- 자체 소화성 및 난연성 PVC, DIN VDE 0482 part 265-2-1/EN 50265-2-1/IEC 60332-1 (VDE 0472 part 804 및 IEC 60332-1 검사방법 B)
- 사용한 재질은 카드뮴 실리콘등을 함유하지 않은 소재로 락커의 습윤 (濕潤) 특성을 저해하는 물질 없음.

용도

- H05 V-K DIN VDE 0281 part 3 규격 PVC 연결용 접퍼
본 절연선은 장비 내부 뿐만 아니라 직사 조명, 건조한 실내, 스위치와 배전판 생산, 전광판 속, 석회외장 아래 및 표면 등의 위치에 설치함.
- CE = The product is conformed with the EC Low-Voltage Directive 2006/95/EG

Cross-section mm ² ca. RAL	Outer ø max. mm	Cop. weight kg / km	black	gn-ye	blue	brown	red	white	grey	vio	ye	pink	green	trans	dk-bu	og	o.col.	2-col.	u-blue
			9005	6018	5015	8003	3000	1031	7000	4005	1021	3015	6018	-	5010	2003	-	-	5002



Coil in cardboard (100m)

Packing

H05 V-K

Part No.	Outer ø	Cop. weight	29081	29082	29083	29084	29085	29086	29087	29088	29089	29090	29091	29092	29093	29094	29095	29096	26386	
0.5	2.1-2.5	4.8																		
0.75	2.2-2.7	7.2	29097	29098	29099	29100	29101	29102	29103	29104	29105	29106	29107	29108	29109	29110	29111	29112	26387	
1	2.4-2.8	9.6	29113	29114	29115	29116	29117	29118	29119	29120	29121	29122	29123	29124	29125	29126	29127	29128	26388	



Spool (with various capacity)

Packing

H05 V-K

Part No.	Outer ø	Cop. weight	26590	26591	26592	26593	26594	26595	26596	26597	26598	26599	26600	26601	26602	26603	26604	26605	26389
0.5	2.1-2.5	4.8																	
0.75	2.2-2.7	7.2	26606	26607	26608	26609	26610	26611	26612	26613	26614	26615	26616	26617	26618	26619	26620	26621	26390
1	2.4-2.8	9.6	26622	26623	26624	26625	26626	26627	26628	26629	26630	26631	26632	26633	26634	26635	26636	26637	26391

Dimensions and specifications may be changed without prior notice.

H05 V-K PVC-Single Cores, fine wire stranded



Cross-section mm ²	Outer ø max. mm	Cop. weight kg / km	black	gn-ye	blue	brown	red	white	grey	vio	ye	pink	green	trans	dk-bu	og	o.col.	2-col.	u-blue
ca. RAL			9005	6018	5015	8003	3000	1031	7000	4005	1021	3015	6018	-	5010	2003	-	-	5002



Packing

Barrel (with various capacity)

H05 V-K	Part No.	Outer ø max. mm	Cop. weight kg / km	26640	26641	26642	26643	26644	26645	26646	26647	26648	26649	26650	26651	26652	26653	26654	26655	26392
0,5	2.1-2.5	4.8	26656	26657	26658	26659	26660	26661	26662	26663	26664	26665	26666	26667	26668	26669	26670	26671	26393	
0,75	2.2-2.7	7.2	26672	26673	26674	26675	26676	26677	26678	26679	26680	26681	26682	26683	26684	26685	26686	26687	26394	
1	2.4-2.8	9.6																		

Dimensions and specifications may be changed without prior notice.

Protective tubes

- HELUcond protective tubes
- Divisible protective HELUcond CO
- Tubes made of metal / Anaconda protective tubes
- Tube connectors
- HELUTOP® Fast Clamp cable gland / circlip pliers
- Divisible tubes
- Protective tubes distributor
- Tubing clamp
- HELUcond Jumbosystem
- Termination



You can find protective tubes in our catalogue cable accessories. Request it now at www.helukabel.de