


HCC SERIES


HCC SERIES

Single row connector

HCC

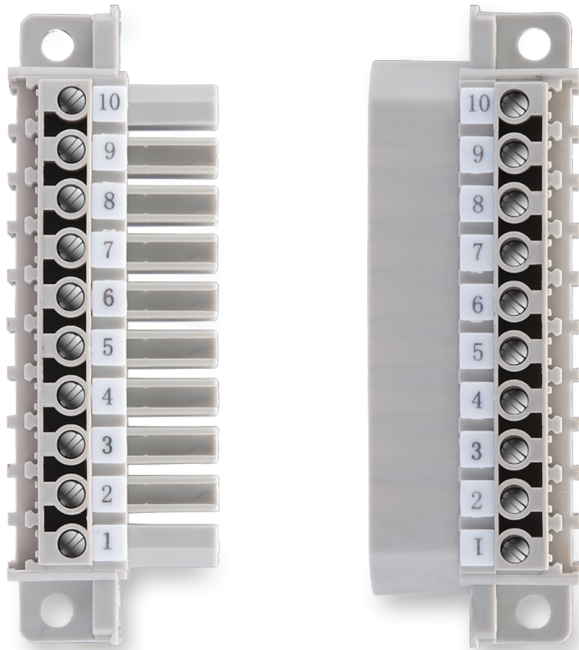


HCC single row inserts

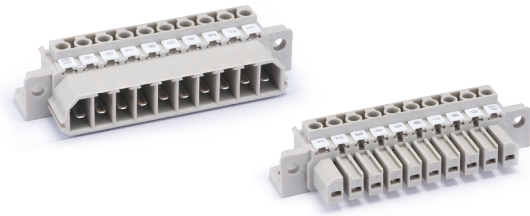

Technical characteristics

Specifications	
	DIN EN 60 664
	DIN EN 61 984
Inserts	
Rated current	30A
Rated voltage	500V
Rated impulse voltage	6kV
Pollution degree	3
Limiting temperatures	-40°C...+125°C
Flammability	V0
Mechanical working life(mating cycles)	≥ 500
Contacts	
Number of contacts	10
Terminal	screw terminal
Wire gauge	0.32-4mm ²
Material	copper alloy
Surface	gold plated



HCC

Inserts

Screw terminal



Insert	Designation	Order No.
Male	HCC-010-M	03C01010100
Female	HCC-010-F	03C01010200

