


Cross Section

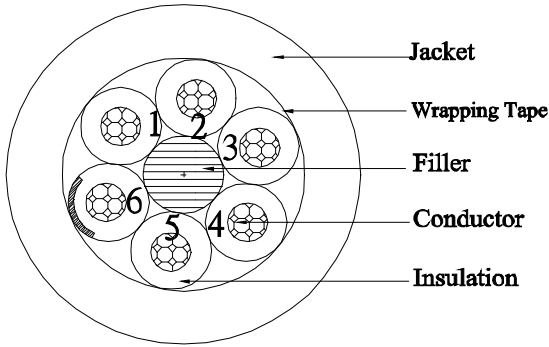

Color

Insulation Color:	
1	Black
2	White
3	Red
4	Brown
5	Blue
6	Yellow/Green

Outer Jacket :
According to Customer's requirement.

Marking

XXXXXXm MM/DD/YY LTK CABLE10 6G0.2 300/300V E148000
AWM STYLE 2464 80°C 300V VW-1 -LF- PCxx CE RoHS conform

Performance

Electrical Characteristics(20°C):	
Max. Conductor DC Resistance (Ω/km)	94.2
Dielectric Strength (kV/1min, AC)	2.0
Max. Allowable Current (@20°C)	2.0 A

Description

Rated Temperature (°C)	-20~80°C
Rated Voltage (V)	300V
Flammability	VW-1

Reference Standard
UL 758 & Customer's requirements

Construction

Conductor	Stranded Bare Copper
Cores	6C
Cross Section (mm ²)	0.20
Construction (mm)	41/0.08+Tinsel
Insulation	PP
Nom. Thickness (mm)	0.20
Insulation Dia. (±0.10mm)	1.15
Cabling	6C+Filler(optional)
Wrapping Tape (Coverage %)	100%
Jacket	PVC
Nom. Thickness (mm)	0.76
Min. Thickness (mm)	0.61
Outer Dia. (±0.30mm)	5.30

Mechanical Characteristics:

Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	≧ 10.30
Aging Elongation (%)	≧ 100
Aging Condition (°C)	113±2°C x 168h
After Tensile Strength (Mpa)	≧ 70% of original
Aging Elongation (%)	≧ 65% of original
Deformation (121±2°Cx1h)	≧ 50%
Cold Bend (-20±2°Cx4h)	No Crack
Heat Shock (121±2°Cx1h)	No Crack
Oil Resistant	
Abrasion Resistant	
Sliding Test (R≧7.5D; Travel ≦2m; Rate: ≦2m/s)	≧ 10 millions

Environmental Restricted Substance Requirement

- RoHS2.0
 - REACH
 - CP65
 - Antimony free (Sb<700ppm)
 - HF (Cl<900ppm; Br<900ppm. Cl+Br<1500ppm)
 - SONY SS-00259
- "" means Compliance

CHAIN-210692

Part No.: ----

Customer WILLTEC

Ref. spec No. :

Rev.: 0

Revision History



LTK INTERNATIONAL LIMITED

Tel: (852) 2385 1866 Web: www.ltkcable.com
Fax: (852) 2572 3832 WeChat: LTK_Cable

- LTK Electric Wire (Huizhou) Ltd
- Huizhou LTK Electronic Cable Ltd
- LTK Electric Wire (Changzhou) Ltd
- LTK Cable (Vietnam) Ltd

Prepared by: KAKA 2021/11/29 Table No.:TFA046 Rev.:9
Approved by: EMMA 2021/11/29 Page 1 of 1

* Usage instruction: (The followings are general instructions , if there are special requirements, please follow the specific specifications)
Not to be used directly in corrosive environments such as strong acids and strong alkaline. not be immersed in water or in a high humidity environment.
not be exposed in the sunlight outdoor. It is suggested the wiring minimum bending radius shall be 5 times OD and more, and can not be used in strong stress conditions. The wire needs to be stored indoors, in a dry and ventilated environment. If there's some special requirements for wire , please contact with our sales .
When customers purchase our products,they should test to verify whether the products is applicable to the usage.