


Cross Section

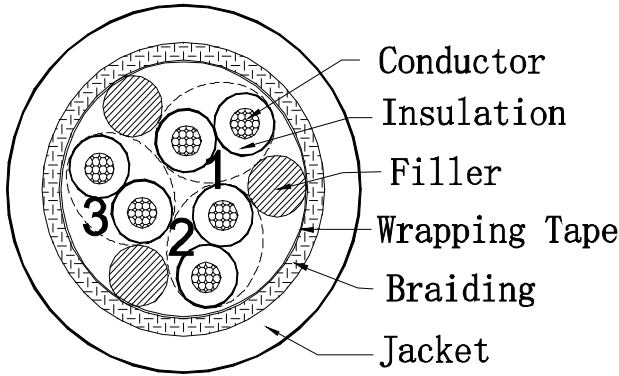

Color

Pair Color:

1	White-Brown
2	Green-Yellow
3	Gray-Pink

Outer Jacket :  
According to Customer's requirement.

Marking

XXXXXXm MM/DD/YY LTK CABLE10 3PX0.2 300/300V E148000  
AWM STYLE 2464 80°C 300V VW-1 -LF- PCxx CE RoHS conform

Performance

Electrical Characteristics(20°C):

Max. Conductor DC Resistance (Ω/km)	94.2
Dielectric Strength (kV/1min, AC)	2.0

Description

Rated Temperature (°C)	-20~80°C
Rated Voltage (V)	300V
Flammability	VW-1

The goods conform to the standard of RoHS.

Reference Standard  
UL 758 & Customer's requirements

Construction

Conductor	Stranded Tinned Copper
Cores	3P
Cross Section (mm <sup>2</sup> )	0.20
Construction (mm)	41/0.08+Tinsel
Insulation	PP
Nom. Thickness (mm)	0.20
Insulation Dia. (±0.10mm)	1.15
Twisted Pair	2C
Filler	Yes
Cabling	3P+Filler
Wrapping Tape(Coverage,%)	100%
Braided Shielding	Tinned Copper
Coverage, %	≥ 85%
Jacket	PVC
Nom. Thickness (mm)	0.76
Min. Thickness (mm)	0.61
Outer Dia. (±0.30mm)	6.60

Mechanical Characteristics:

Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	≥ 10.30
Aging Elongation (%)	≥ 100
Aging Condition (°C)	113±2°C x 168h
After Tensile Strength (Mpa)	≥ 70% of original
Aging Elongation (%)	≥ 65% of original
Deformation (121±2°C x 1h)	≤ 50%
Cold Bend (-20±2°C x 4h)	No Crack
Heat Shock (121±2°C x 1h)	No Crack
Oil Resistant	
Abraision Resistant	
Sliding Test (R≥7.5D; Travel ≤2m; Rate: ≤2m/s)	≥ 10 million times

CHAIN-180623-2

Part No.: -----

Customer:

Ref. spec No. : SK-CHAIN-1725

Rev.: 0

Revision History



LTK INTERNATIONAL LIMITED

Suite 502, Concordia Plaza, 1 Science Museum Road  
Tsimshatsui East, Kowloon, Hong Kong  
Tel : (852) 2382 1133 Fax : (852) 2480 6327  
Email : sales@ltkable.com URL : www.ltkable.com

- LTK Electric Wire (Huizhou) Ltd
- Huizhou LTK Electronic Cable Ltd
- LTK Electric Wire (Changzhou) Ltd
- LTK Cable (Chongqing) Ltd
- Dalian LTK Electric Wire Ltd

Prepared by: KAKA 2019/11/4 Table No.:TFA046 Rev.:7  
Approved by: EMMA 2019/11/4 Page 1 of 1

\* Usage instruction:

Not to be used directly in corrosive environments such as strong acids and strong alkaline. not be immersed in water or in a high humidity environment. not be exposed in the sunlight outdoor. It is suggested the wiring minimum bending radius shall be 5 times OD and more, and can not be used in strong stress conditions. The wire needs to be stored indoors, in a dry and ventilated environment. If there's some special requirements for wire , please contact with our sales . When customers purchase our products,they should test to verify whether the products is applicable to the usage.