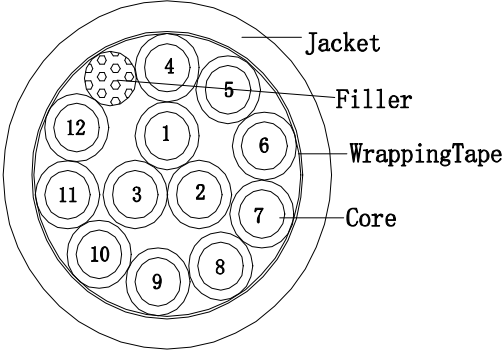



LTK Fixed CABLE 12G6.0mm ²		Part No.:	----																														
<p align="center">Cross Section</p> 		<p align="center">Color</p> <p>Insulation Color:</p> <ol style="list-style-type: none"> 1 Black 2 White 3 Red 4 Brown 5 Blue 6 Gray 7 Orange 8 Violet 9 Pink 10 Light Blue 11 Light Gray 12 Yellow/Green <p>Outer Jacket : According to Customer's requirement.</p>																															
<p align="center">Marking</p> <p>XXXXXXm MM/DD/YYYY LTK CABLE 12G6.0 450/750V E148000 </p> <p>AWM STYLE 2570 80°C 1000V VW-1 -LF- PCxx CE RoHS conform</p>		<p align="center">Performance</p> <p>Electrical Characteristics(20°C):</p> <table border="0"> <tr> <td>Max. Conductor DC Resistance (Ω/km)</td> <td align="right">3.30</td> </tr> <tr> <td>Dielectric Strength (kV/1min, AC)</td> <td align="right">3.0</td> </tr> </table>		Max. Conductor DC Resistance (Ω/km)	3.30	Dielectric Strength (kV/1min, AC)	3.0																										
Max. Conductor DC Resistance (Ω/km)	3.30																																
Dielectric Strength (kV/1min, AC)	3.0																																
<p align="center">Description</p> <table border="0"> <tr> <td>Rated Temperature (°C)</td> <td align="right">-20~80°C</td> </tr> <tr> <td>Rated Voltage (V)</td> <td align="right">450/750V</td> </tr> <tr> <td>Flammability</td> <td align="right">VW-1</td> </tr> </table>		Rated Temperature (°C)	-20~80°C	Rated Voltage (V)	450/750V	Flammability	VW-1	<p>Mechanical Characteristics:</p> <table border="0"> <tr> <td>Test Object</td> <td align="right">Jacket</td> </tr> <tr> <td>Test Material</td> <td align="right">PVC</td> </tr> <tr> <td>Before Tensile Strength (Mpa)</td> <td align="right">≥ 10.30</td> </tr> <tr> <td>Aging Elongation (%)</td> <td align="right">≥ 100</td> </tr> <tr> <td>Aging Condition (°C)</td> <td align="right">113±2°C x 168h</td> </tr> <tr> <td>After Tensile Strength (Mpa)</td> <td align="right">≥ 70% of original</td> </tr> <tr> <td>Aging Elongation (%)</td> <td align="right">≥ 65% of original</td> </tr> <tr> <td>Deformation (121±2°Cx1h)</td> <td align="right">≤ 50%</td> </tr> <tr> <td>Cold Bend (-20±2°Cx4h)</td> <td align="right">No Crack</td> </tr> <tr> <td>Heat Shock (121±2°Cx1h)</td> <td align="right">No Crack</td> </tr> <tr> <td>Oil Resistant</td> <td></td> </tr> <tr> <td>Abraision Resistant</td> <td></td> </tr> </table>		Test Object	Jacket	Test Material	PVC	Before Tensile Strength (Mpa)	≥ 10.30	Aging Elongation (%)	≥ 100	Aging Condition (°C)	113±2°C x 168h	After Tensile Strength (Mpa)	≥ 70% of original	Aging Elongation (%)	≥ 65% of original	Deformation (121±2°Cx1h)	≤ 50%	Cold Bend (-20±2°Cx4h)	No Crack	Heat Shock (121±2°Cx1h)	No Crack	Oil Resistant		Abraision Resistant	
Rated Temperature (°C)	-20~80°C																																
Rated Voltage (V)	450/750V																																
Flammability	VW-1																																
Test Object	Jacket																																
Test Material	PVC																																
Before Tensile Strength (Mpa)	≥ 10.30																																
Aging Elongation (%)	≥ 100																																
Aging Condition (°C)	113±2°C x 168h																																
After Tensile Strength (Mpa)	≥ 70% of original																																
Aging Elongation (%)	≥ 65% of original																																
Deformation (121±2°Cx1h)	≤ 50%																																
Cold Bend (-20±2°Cx4h)	No Crack																																
Heat Shock (121±2°Cx1h)	No Crack																																
Oil Resistant																																	
Abraision Resistant																																	
<p>Reference Standard UL 758 & Customer's requirements</p>																																	
<p align="center">Construction</p> <table border="0"> <tr> <td>Conductor</td> <td align="right">Stranded Bare Copper</td> </tr> <tr> <td>Cores</td> <td align="right">12C</td> </tr> <tr> <td>Cross Section (mm²)</td> <td align="right">6.0</td> </tr> <tr> <td>Construction (mm)</td> <td align="right">84/0.30</td> </tr> <tr> <td>Insulation</td> <td align="right">PVC</td> </tr> <tr> <td>Nom. Thickness (mm)</td> <td align="right">0.60</td> </tr> <tr> <td>Insulation Dia. (±0.15mm)</td> <td align="right">4.50</td> </tr> <tr> <td>Cabling</td> <td align="right">12C+Filler(optional)</td> </tr> <tr> <td>Wrapping Tape (Coverage %)</td> <td align="right">100%</td> </tr> <tr> <td>Jacket</td> <td align="right">PVC</td> </tr> <tr> <td>Nom. Thickness (mm)</td> <td align="right">1.52</td> </tr> <tr> <td>Min. Thickness (mm)</td> <td align="right">1.22</td> </tr> <tr> <td>Outer Dia. (±0.80mm)</td> <td align="right">23.00</td> </tr> </table>		Conductor	Stranded Bare Copper	Cores	12C	Cross Section (mm ²)	6.0	Construction (mm)	84/0.30	Insulation	PVC	Nom. Thickness (mm)	0.60	Insulation Dia. (±0.15mm)	4.50	Cabling	12C+Filler(optional)	Wrapping Tape (Coverage %)	100%	Jacket	PVC	Nom. Thickness (mm)	1.52	Min. Thickness (mm)	1.22	Outer Dia. (±0.80mm)	23.00						
Conductor	Stranded Bare Copper																																
Cores	12C																																
Cross Section (mm ²)	6.0																																
Construction (mm)	84/0.30																																
Insulation	PVC																																
Nom. Thickness (mm)	0.60																																
Insulation Dia. (±0.15mm)	4.50																																
Cabling	12C+Filler(optional)																																
Wrapping Tape (Coverage %)	100%																																
Jacket	PVC																																
Nom. Thickness (mm)	1.52																																
Min. Thickness (mm)	1.22																																
Outer Dia. (±0.80mm)	23.00																																
		<p align="center">Environmental Restricted Substance Requirement</p> <ul style="list-style-type: none"> <input checked="" type="checkbox"/> RoHS2.0 <input checked="" type="checkbox"/> REACH <input type="checkbox"/> CP65 <input type="checkbox"/> Antimony free (Sb<700ppm) <input type="checkbox"/> HF (Cl<900ppm; Br<900ppm. Cl+Br<1500ppm) <input type="checkbox"/> SONY SS-00259 <input checked="" type="checkbox"/> "■"means Compliance 																															
<p>CHAIN-220053</p>		<p align="center">LTK INTERNATIONAL LIMITED</p> <p>Tel: (852) 2385 1866 Web: www.ltkcable.com Fax: (852) 2572 3832 WeChat: LTK_Cable</p>																															
<p>Part No.: ----</p>																																	
		<p align="center">Customer WILLTEC</p>																															
<p>Ref. spec No. :</p>		<p align="center">Rev.: 0</p>																															
<p align="center">Revision History</p>																																	
		<p>Prepared by: KAKA 2022/2/9 Table No.:TFA046 Rev.:9 Approved by: EMMA 2022/2/9 Page 1 of 1</p>																															

* Usage instruction: (The followings are general instructions , if there are special requirements, please follow the specific specifications)
Not to be used directly in corrosive environments such as strong acids and strong alkaline. not be immersed in water or in a high humidity environment.
not be exposed in the sunlight outdoor. It is suggested the wiring minimum bending radius shall be 5 times OD and more, and can not be used in strong stress conditions. The wire needs to be stored indoors, in a dry and ventilated environment. If there's some special requirements for wire , please contact with our sales .
When customers purchase our products,they should test to verify whether the products is applicable to the usage.