


Cross Section

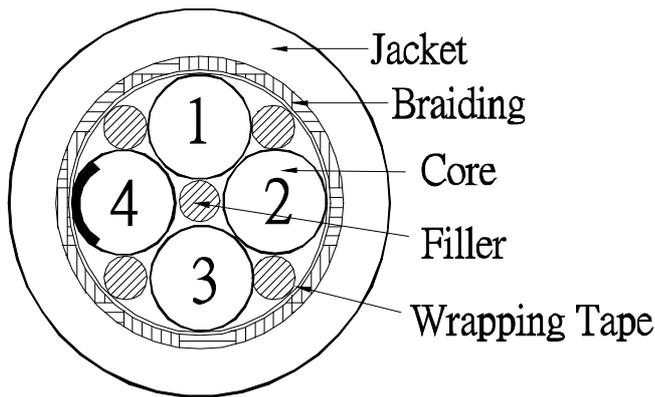

Color

Insulation Color:	
1	Black
2	White
3	Red
4	Yellow/Green

Outer Jacket :
According to Customer's requirement.

Marking

XXXXXXm MM/DD/YY LTK CABLE10 (4G1.5)C 300/500V E148000
AWM STYLE 2464 80°C 300V VW-1 -LF- PCxx CE RoHS conform

Performance

Electrical Characteristics(20°C):	
Max. Conductor DC Resistance (Ω/km)	13.3
Dielectric Strength (kV/1min, AC)	2.0

Description

Rated Temperature (°C)	-20~80°C
Rated Voltage (V)	300/500V
Flammability	VW-1

Reference Standard
UL 758, UL1581 & Customer's requirements

Construction

Conductor	Stranded Bare Copper
Cores	4C
Cross Section (mm ²)	1.50
Construction (mm)	84/0.15
Insulation	PP
Nom. Thickness (mm)	0.25
Insulation Dia. (±0.15mm)	2.40
Cabling	4C+Filler(optional)
Wrapping Tape (Coverage %)	100%
Braided Shielding	Tinned Copper
Coverage (nom. %)	85%
Jacket	PVC
Nom. Thickness (mm)	0.76
Min. Thickness (mm)	0.61
Outer Dia. (±0.40mm)	8.60

Mechanical Characteristics:

Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	≥ 10.30
Aging Elongation (%)	≥ 100
Aging Condition (°C)	113±2°C x 168h
After Tensile Strength (Mpa)	≥ 70% of original
Aging Elongation (%)	≥ 65% of original
Deformation (121±2°C x1h)	≤ 50%
Cold Bend (-20±2°C x4h)	No Crack
Heat Shock (121±2°C x1h)	No Crack
Oil Resistant	
Abraision Resistant	
Sliding Test (R≥7.5D; Travel ≤2m; Rate: ≤2m/s)	≥ 10 million times

Environmental Restricted Substance Requirement

- RoHS2.0
- REACH
- CP65
- Antimony free (Sb<700ppm)
- HF (Cl<900ppm; Br<900ppm. Cl+Br<1500ppm)

means Compliance



LTK INTERNATIONAL LIMITED

Suite 502, Concordia Plaza, 1 Science Museum Road
Tsimshatsui East, Kowloon, Hong Kong
Tel : (852) 2382 1133 Fax : (852) 2480 6327
Email : sales@ltkable.com URL : www.ltkable.com

- LTK Electric Wire (Huizhou) Ltd • Huizhou LTK Electronic Cable Ltd
- LTK Electric Wire (Changzhou) Ltd • LTK Cable (Chongqing) Ltd
- Dalian LTK Electric Wire Ltd

CHAIN-210269

Part No.: ----

Customer WILLTEC

Ref. spec No. :

Rev.: 0

Revision History

Prepared by: KAKA 2021/3/29 Table No.:TFA046 Rev.:8
Approved by: EMMA 2021/3/29 Page 1 of 1

* Usage instruction:

Not to be used directly in corrosive environments such as strong acids and strong alkaline. not be immersed in water or in a high humidity environment. not be exposed in the sunlight outdoor. It is suggested the wiring minimum bending radius shall be 5 times OD and more, and can not be used in strong stress conditions. The wire needs to be stored indoors, in a dry and ventilated environment. If there's some special requirements for wire , please contact with our sales . When customers purchase our products,they should test to verify whether the products is applicable to the usage.