


Cross Section

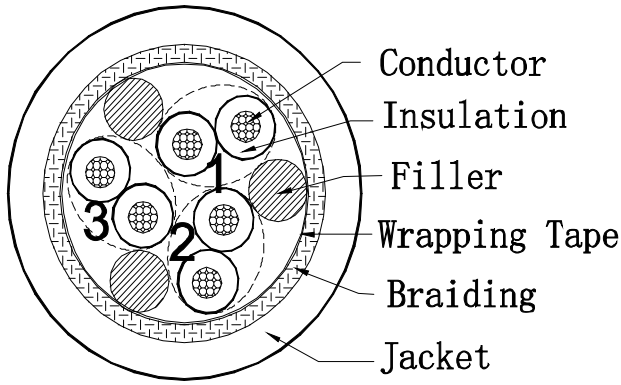

Color

Pair Color:	
1	White-Brown
2	Green-Yellow
3	Gray-Pink

Marking

LTK CABLE10 (3PX0.2)C 300V E148000 AWM STYLE 20549 80°C 300V
 -LF- PCxx CE RoHS conform MM/DD/YYYY XXXXXm **AMA ROBOFLEX**

Performance

Electrical Characteristics(20°C):	
Max. Conductor DC Resistance (Ω/km)	94.2
Dielectric Strength (kV/1min, AC)	2.0

Description

Rated Temperature (°C)	-40~80°C
Rated Voltage (V)	300V
Flammability	IEC 60332-1

Reference Standard

UL 758 & Customer's requirements

Construction

Conductor	Stranded Tinned Copper
Cores	3P
Cross Section (mm ²)	0.20
Construction (mm)	41/0.08+Tinsel
Insulation	PP
Nom. Thickness (mm)	0.20
Insulation Dia. (±0.10mm)	1.15
Twisted Pair	2C
Filler	Yes
Cabling	3P+Filler
Wrapping Tape(Coverage,%)	100%
Braided Shielding	Tinned Copper
Coverage, %	≥ 85%
Wrapping Tape(Coverage,%)	100%
Jacket	TPU
Nom. Thickness (mm)	0.76
Min. Thickness (mm)	0.61
Outer Dia. (±0.30mm)	6.60

Outer Jacket :

According to Customer's requirement.

Mechanical Characteristics:

Test Object	Jacket
Test Material	TPU
Before Tensile Strength (Mpa)	≥ 10.30
Aging Elongation (%)	≥ 100
Aging Condition (°C)	113±2°C x 168h
After Tensile Strength (Mpa)	≥ 70% of original
Aging Elongation (%)	≥ 65% of original
Deformation (121±2°C x1h)	≤ 50%
Cold Bend (-40±2°C x4h)	No Crack
Heat Shock (121±2°C x1h)	No Crack
Oil Resistant	
Abrasion Resistant	
Sliding Test (R≥7.5D: Travel ≤2m; Rate: ≤2m/s)	≥ 10 million times

Environmental Restricted Substance Requirement

- RoHS2.0
- REACH
- CP65
- Antimony free (Sb<700ppm)
- HF (Cl<900ppm; Br<900ppm. Cl+Br<1500ppm)

“” means Compliance



LTK INTERNATIONAL LIMITED

Tel: (852) 2385 1866 Web: www.ltkcable.com
 Fax: (852) 2572 3832 WeChat: LTK_Cable

- LTK Electric Wire (Huizhou) Ltd
- Huizhou LTK Electronic Cable Ltd
- LTK Electric Wire (Changzhou) Ltd
- LTK Cable (Vietnam) Ltd

CHAIN-210607

Part No.: -----

Customer: Acetechnics

Ref. spec No. : -----

Rev.: 0

Revision History

Prepared by: KAKA 2021/9/14 Table No.:TFA046 Rev.:9
 Approved by: EMMA 2021/9/14 Page 1 of 1

* Usage instruction:

Not to be used directly in corrosive environments such as strong acids and strong alkaline. not be immersed in water or in a high humidity environment. not be exposed in the sunlight outdoor. It is suggested the wiring minimum bending radius shall be 5 times OD and more, and can not be used in strong stress conditions. The wire needs to be stored indoors, in a dry and ventilated environment. If there's some special requirements for wire , please contact with our sales . When customers purchase our products,they should test to verify whether the products is applicable to the usage.